



# INTERLUXX

## 3-FASEN / 3 ALLUMAGES



### PROFESSIONAL LIGHTING

1-FASE LEDSPOTS      SPOTS LED 1-PHASE  
 3-FASEN LEDSPOTS    SPOTS LED 3-PHASES  
 RAILS & MONTAGE      RAILS & MONTAGE

### RAIL SPOTS / SPOTS SUR RAIL



[www.nnlight.be](http://www.nnlight.be)

# TRACK LIGHTING





Tracklights INTERLUXX voor Professionele toepassingen  
 1-Fase en 3-Fasen Spots & Lineaire verlichtingsarmaturen.  
 Hoge CRI voor perfecte kleurweergave.

### SMART LIGHTING & DIMMING



*Spots sur rail INTERLUXX pour applications professionnelles*  
*Spots et luminaires linéaires monophasés et triphasés*  
*CRI élevé pour une reproduction parfaite des couleurs*

HIGH CRI LIGHTING

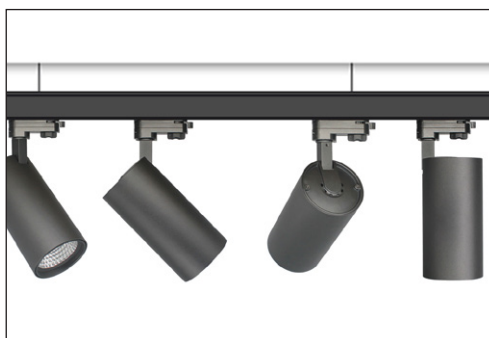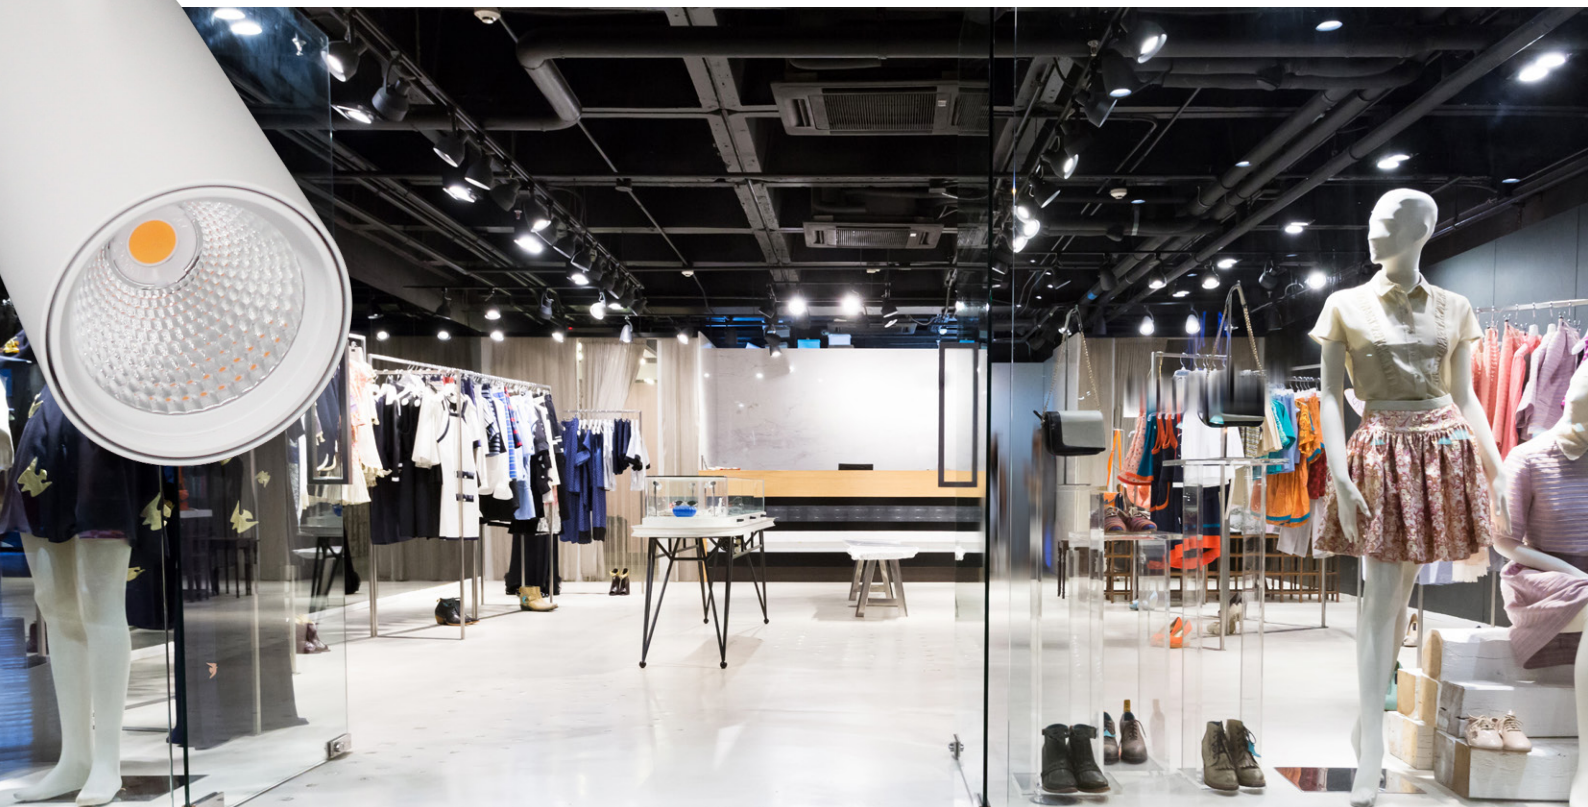

ONLINE CATALOGUS



CATALOGUE EN LIGNE

PROFESSIONAL QUALITY LIGHTING

**INTERLUXX**  
 LIGHTING SOLUTIONS

EXCLUSIEF VERDELER VOOR BELGIË / DISTRIBUTEUR EXCLUSIF POUR LA BELGIQUE  
 NN LIGHT Oeyvaersbosch 20-22, 2630 AARTSELAAR info@nnlight.be +32 (0)3 877 16 16



# INTERLUXX

## PROFESSIONAL TRACK LIGHTING SOLUTIONS



INTERLUXX omvat een ruim gamma aan hoogkwalitatieve spots 3-fase en 1-fase. Ideaal voor al uw projecten en professionele toepassingen.

*INTERLUXX comprend une large gamme de spots de haute qualité triphasé et monophasé. Idéal pour toutes vos projets et applications professionnelles.*

Beantwoordend aan de hoogste technische normen en een levensduur van 50000u. Drivers en hoogwaardige LED CHIPS garanderen een perfecte kleurweergave.

*Les normes techniques les plus élevées se traduisent par une durée de vie de 50 000h. Les pilotes et les CHIP LED de haute qualité garantissent un respect parfait des couleurs.*

### KLEDINGZAKEN BOUTIQUES



### SHOWROOMS SALLES D'EXPOSITION



### VOEDING ALIMENTAIRE



### WINKELCENTRA CENTRES COMMERCIAUX




### RESIDENTIEEL RESIDENTIEL



### GALERIES GALERIES



IONS

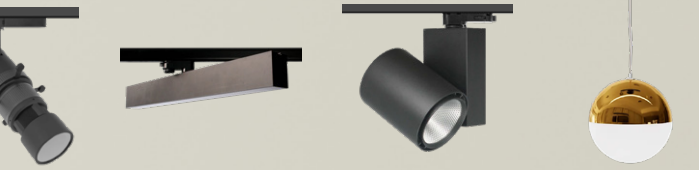

INTERLUXX biedt tevens meerdere dimming technieken: Triac, 1-10v, RF, DALI en Casambi. Smart Lighting en zorgeloos verlichten met een productgarantie van 5 jaar.

*INTERLUXX offre des différentes façons de gradation: Triac, 1-10v, RF, DALI & Casambi. Smart Lighting et la lumière sans soucis avec une garantie des éclairages de 5 ans.*




# INTERLUXX

Customized Project Lighting

- |                       |                          |
|-----------------------|--------------------------|
| Spots 1-Fase          | Spots monophasés         |
| Spots 3-Fasen         | Spots triphasés          |
| Star Low UGR          | Anti-éblouissement Star  |
| Linear 3-Fasen        | 3-Phases Linéaires       |
| Hanglampen            | Lampes suspendus         |
| Special Food Lighting | Alimentaire              |
| Hyro Series Galleries | Hyro Eclairage Galleries |
| Magnetic Rail System  | Rails Magnétiques 48V    |

## TRACK SYSTEMEN / SYSTÈMES RAILS

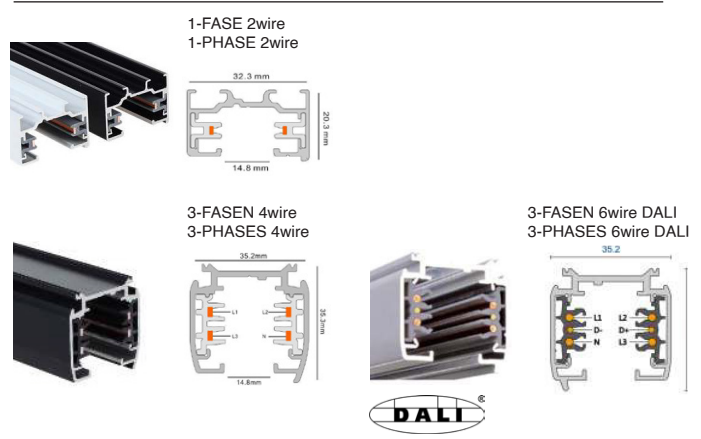

## DOWNLOADS TÉLÉCHARGEMENTS

TECHNISCHE FICHES




FICHES TECHNIQUES

## MERKEN MARQUES

- PHILIPS
- TRIDONIC
- OSRAM
- LIFUD
- CITIZEN
- VS LIGHTING SOLUTIONS



## ADAPTER TYPE ADAPTATEUR

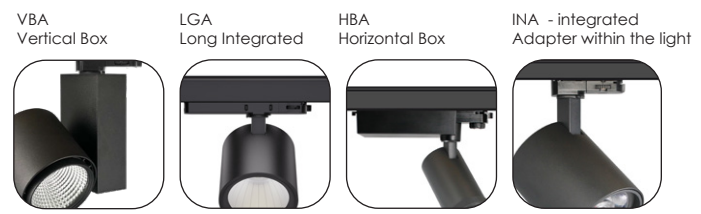



# HYRO SERIES FOCUS

## ART GALLERY LEVEL LIGHTING

# SÉRIE FOCUS HYRO

## ECLAIRAGE GALERIE D'ART

**HYRO A10** 183mm



○ ● Dimmable  
12W Zoom  
820-900 Lm  
Ø55 x 183mm

2700K 3000K 4000K

HIGH CRI Ra90, Ra97  
Zoomable Faisceau Variable



Driver VS & OSRAM, DALI TCI  
HYRO A10 D55 ZOOM

**HYRO A11** 183mm



○ ● Dimmable  
30W  
2800 Lm  
Ø90 x 183mm

2700K 3000K 4000K

HIGH CRI Ra90 / Ra97  
Tunable White CW/WW  
Lichthoeken Angles de faisceau



Driver OSRAM & TCI-DALI  
HYRO A11

**HYRO C1** 183mm



○ ● Dimmable  
30W 35W  
2500/3000 Lm  
Ø95 x 183mm

2700K 3000K 4000K

HIGH CRI Ra90 / Ra97  
Vivid Colours Ra95  
Zoomable Faisceau Variable



Driver CE, OSRAM & TRIDONIC  
HYRO C1

**HYRO P112** 193mm



○ ● Dimmable  
12W  
350 Lm  
Ø60 x 193mm

2700K 3000K 4000K

HIGH CRI Ra92  
Adjustable Framing 37°  
P1 12W Dimmer on Lamp (DOL)  
Driver Integrated / Pilote Intégré




**HYRO P120** 208mm



○ ● Dimmable  
20W  
550 Lm  
Ø85 x 208mm

2700K 3000K 4000K

HIGH CRI Ra92  
Adjustable Framing 37°  
P1 12W Dimmer on Lamp (DOL)  
Driver Integrated / Pilote Intégré

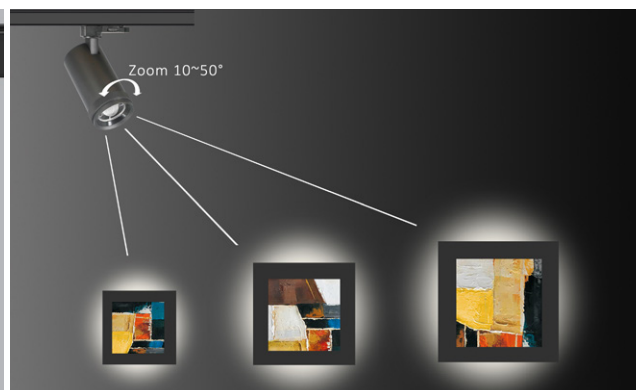

4 lichthoeken optische lens  
4 angles lentille optique

extra ring om de lens te plaatsen  
anneau supplémentaire pour fixer la lentille

anti-verblinding 'hongingraat' voorzetfilter  
filtre 'nid d'abeille' spécial anti-éblouissement

uniek design om de spot aan te passen met 'honeycomb' of barndoors  
design unique pour monter facilement un filtre 'nid d'abeille' ou des volets



# MAGNETIC RAILS 48V




**MICRO-S** 50mm



**MINI** 70mm



**MADY** 105mm



# RAILS MAGNÉTIQUES 48V

## LOW VOLTAGE SMART LIGHTING

**HIZO** 70mm



**TARGET** 105mm



**MAGNA** 47mm



5W HIGH CRI Ra90  
400 Lm / 360 Lm ww/cw  
Ø30 x 50mm micro-s  
2700K 3000K 4000K  
HIGH CRI Ra90  
Lichthoeken / Angles  
15° 24° 36°  
48V  
TL01-D30 5W

6W Dimmable  
480 Lm  
Ø40 x 70mm mini  
2700K 3000K 4000K  
HIGH CRI Ra90  
Lichthoeken / Angles  
24° 36° 60°  
48V  
TL01-D40 6W



10W Dimmable  
800 Lm  
Ø40 x 105mm compact  
2700K 3000K 4000K  
HIGH CRI Ra90  
Lichthoeken / Angles  
24° 36° 60°  
48V  
TL01-D40 10W

10W Dimmable  
800 Lm  
Ø55 x 70mm  
2700K 3000K 4000K  
HIGH CRI Ra90  
Lichthoeken / Angles  
24° 36° 60°  
48V  
TL01-D55 10W


15W Dimmable  
1200 Lm  
Ø55 x 105mm  
2700K 3000K 4000K  
HIGH CRI Ra90  
Lichthoeken / Angles  
24° 36° 60°  
48V  
TL01-D55 15W

15W Dimmable  
1300 Lm  
Ø90 x 47mm  
2700K 3000K 4000K  
HIGH CRI Ra90  
Lichthoeken / Angles  
24° 36° 60°  
48V  
TL01-D90 15W

Magnetic Spotlights PREMIUM High CRI97  
op aanvraag / sur demande

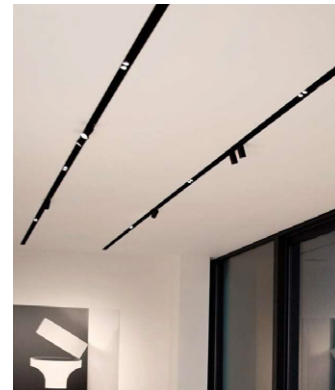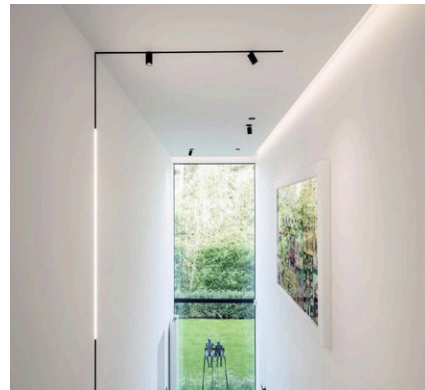

### LL22 MAG 48V LINEAR LIGHT



10W 800 Lm 100°  
22 x 43 x 246mm  
48V RF & DALI



20W 1600 Lm 100°  
22 x 43 x 488mm



30W 2400 Lm 100°  
22 x 43 x 730mm  
48V RF & DALI



2700K 3000K

### LA22A 48V Linear ADJUSTABLE - Compact




6W 480 Lm 24°  
22 x H86 x 117mm  
48V RF & DALI



10W 480 Lm 24°  
22 x H86 x 231mm  
48V RF & DALI

2700K 3000K

### LS22 MAG 48V LINEAR SPOT



10W 800 Lm 24°  
22 x 43 x 231mm  
48V RF & DALI



20W 1600 Lm 24°  
22 x 43 x 458mm  
48V RF & DALI




30W 2400 Lm 24°  
22 x 43 x 685mm  
48V RF & DALI

2700K 3000K



### BOLO 48V HANGLAMP SUSPENSION



6W  
500 Lm  
Ø100mm  
48V  
TL01 D100A Pendant



2700K 3000K

### MAGNETIC 48V TRACKS / RAILS

Type T4  
Opbouw Apparent


Type T2 Hoog Haut  
Opbouw Apparent

Type T3  
Inbouw Encastrable



# FOOD LIGHTING

**CITIZEN**  
CHIP LED HIGH CRI

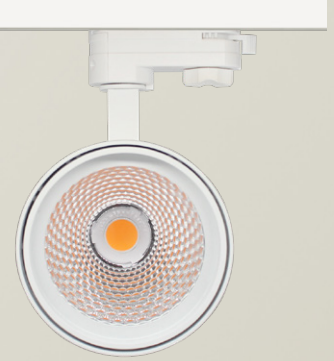

| ALIMENTAIRE / VOEDING | Lumen  | Kelvin | CRI  |
|-----------------------|--------|--------|------|
| Vlees - Viande        | 2100Lm | 3200K  | Ra70 |
| Brood - Pain          | 2100Lm | 2400K  | Ra90 |
| Vis - Poisson         | 2400Lm | 6000K  | Ra90 |
| Groenten - Légumes    | 2400Lm | 4500K  | Ra90 |

Speciale High CRI LED Chips voor voeding  
DE JUISTE VERLICHTING VOOR VOEDINGSWAREN

Chip LED Spéciale pour l'Alimentaire  
METTRE EN VALEUR LES PRODUITS ALIMENTAIRES

- Speciale LED-chip voor voedingswaren
- Optimale productpresentatie
- Kleuren aangepast aan specifieke omstandigheden
- 4 Groepen: Vlees, Brood, Groenten en Vis

- CHIP LED spéciale pour les produits alimentaires
- Présentation optimale des produits
- Des couleurs adaptées aux circonstances spécifiques
- 4 Groupes : Viande, Pain, Légumes & Poisson

Vlees & Vleeswaren  
*Viande & Charcuterie*

Brood & Koffiekoeken  
*Pain & Viennoiserie*


Fruit & Groenten  
*Fruits & Légumes*

Vis & Zeevruchten  
*Poisson & Fruits de mer*




1-FASE 2wire HY91 BLACK  
1-PHASE 2wire HY92 WHITE

1-FASE 3wire HY94 BLACK  
1-PHASE 3wire HY95 WHITE

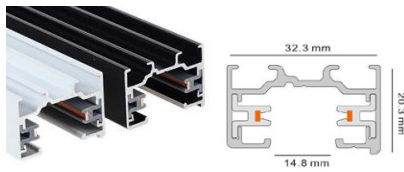

3-FASEN HY96 BLACK  
3-PHASES HY97 WHITE

3-FASE DALI HY98 BLACK  
3-PHASES DALI HY99 WHITE

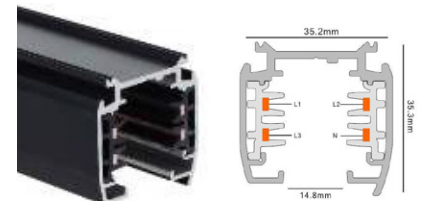

## 1-FASE RAILS

ZWART/NOIR WIT/BLANC

|  |          |          |
|--|----------|----------|
| Track/Rail 1-Phase T210 100cm                  | HY911101 | HY922101 |
| Track/Rail 1-Phase T210 150cm                  | HY911104 | HY922104 |
| Track/Rail 1-Phase T210 200cm                  | HY911107 | HY922105 |
| Toebehoren / Accessoires                       |          |          |
| Track 1-Phase Power Connector 230v 261L        | HY911110 | HY922106 |
| Track 1-Phase Power Connector 230v 261R        | HY911113 | HY922107 |
| Track 1-Phase ENDCAP pvc 230v 266              | HY911116 | HY922108 |
| Straight Connector (inner type) 1-Phase 267    | HY911119 | HY922109 |
| Straight Connector (external type) 1-Phase 266 | HY911122 | HY922110 |
| L-90° Connector Left Side 1-Phase 263L         | HY911125 | HY922111 |
| L-90° Connector Right Side 1-Phase 263R        | HY911128 | HY922112 |
| Rotative Connector 1-Phase 269                 | HY911131 | HY922113 |
| T-Connector Left Side 1-Phase 264L1            | HY911134 | HY922114 |
| T-Connector Left Side 1-Phase 264L2            | HY911137 | HY922115 |
| T-Connector Right Side 1-Phase 264R1           | HY911140 | HY922116 |
| T-Connector Right Side 1-Phase 264R2           | HY911143 | HY922117 |
| X-Connector 265                                | HY911146 | HY922118 |
| Ceiling Mounting Kit 292                       | HY911149 | HY922119 |
| Suspension Mounting Kit 292                    | HY911152 | HY922120 |
| Adapter 201                                    | HY911155 | HY922121 |

## 3-FASE RAILS / RAILS 3 ALLUMAGES

ZWART/NOIR WIT/BLANC

|   |          |          |
|---|----------|----------|
| Track/Rail 3-Phase T410 100cm                       | HY960101 | HY970101 |
| Track/Rail 3-Phase T415 150cm                       | HY960104 | HY970104 |
| Track/Rail 3-Phase T420 200cm                       | HY960107 | HY970107 |
| Toebehoren / Accessoires                            |          |          |
| Track 3-Phase Power Connector 230v 461L with Endcap | HY960110 | HY970110 |
| Track 3-Phase Power Connector 230v 461R with Endcap | HY960113 | HY970113 |
| Straight Connector (inner type) 3-Phase 467         | HY960116 | HY970116 |
| Straight Connector (external type) 3-Phase 462      | HY960119 | HY970119 |
| L-90° Connector Left Side 3-Phase 463L              | HY960122 | HY970122 |
| L-90° Connector Right Side 3-Phase 463R             | HY960125 | HY970125 |
| Rotative Connector 3-Phase 468                      | HY960128 | HY970128 |
| Flexible Connector 3-Phase 469                      | HY960131 | HY970131 |
| T-Connector Left Side 3-Phase 464L1                 | HY960134 | HY970134 |
| T-Connector Left Side 3-Phase 464L2                 | HY960137 | HY970137 |
| T-Connector Right Side 3-Phase 464R1                | HY960140 | HY970140 |
| T-Connector Right Side 3-Phase 464R2                | HY960143 | HY970143 |
| X-Connector LR 3-Phase 465                          | HY960146 | HY970146 |
| Suspension Track Connections fixed kit 494 BLACK    | HY960149 | HY970149 |
| Suspension Mounted Kit max. 150cm 491 BLACK         | HY960152 | HY970152 |
| Ceiling Mounted Kit BLACK                           | HY960155 | HY970155 |
| Surface Mounted Track Base 3M BLACK                 | HY960158 | HY970158 |

## ACCESSOIRES



Voeiding + Endcap  
Alimentation + Embout

Interne Connector  
Connexion interne

Rechte-Connector  
Connexion-Droite

L-Connector 90°  
Connexion-L 90°

Kruisconnector  
Connexion-X

Connector Rotative  
Connexion Rotative

Connector Flexi  
Connexion Flexible



# RAIL SPOTS 3-FASE

# SPOTS TRIPHASÉS

**TLU Shorty 70mm**



○ ● Dimmable  
15W 20W 30W  
1500/2000/3000 Lm  
Ø95 x 70mm  
2700K 3000K 3500K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau  
15° 24° 36° 60°  
Driver OSRAM & TCI-DALI  
TLU-B

**TLU Shorty 115mm**



○ ● Dimmable  
15W 20W 30W  
1500/2000/3000 Lm  
Ø95 x 115mm  
2700K 3000K 3500K 4000K

HIGH CRI Ra90 / Ra97  
Vivid Colours Ra95  
Lichthoeken Angles de faisceau  
15° 24° 36° 60°  
Driver OSRAM & TCI-DALI  
TLU-A

**TLG PRO 170mm**



○ ● Dimmable  
15W 20W 25W  
1500/2000/3000 Lm  
Ø85 x 170mm  
2700K 3000K 3500K 4000K

HIGH CRI Ra90 / Ra97  
Vivid Colours Ra95  
Lichthoeken Angles de faisceau  
20° 38° 60°  
Driver CE, OSRAM & TRIDONIC  
TLG

**TLG PRO 185mm**



○ ● Dimmable  
30W  
3000 Lm  
Ø95 x 185mm  
2700K 3000K 3500K 4000K

HIGH CRI Ra90 / Ra97  
Vivid Colours Ra95  
Lichthoeken Angles de faisceau  
20° 38° 60°  
Driver CE, OSRAM & TRIDONIC  
TLG

**TLQ COB 110mm**



○ ● Dimmable  
6W & 10W Reflector  
600/900 Lm  
Ø50 x 110mm  
2700K 3000K

HIGH CRI Ra90 COB Technology  
Lichthoeken Angles de faisceau  
15° 24° 36°  
Driver PHILIPS  
TRIAC dimmable  
TLQ-T 1-FASE & 3-FASE

**CANTO PRO 80mm**



○ ● Dimmable  
15W 20W  
1500/2000 Lm  
Ø95 x 80mm  
2700K 3000K 3500K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau  
15° 24° 38° 60°  
Driver PHILIPS & CE  
TLE

**CANTO PRO 120mm**



○ ● Dimmable  
30W 35W  
3000/3500 Lm  
Ø95 x 120mm  
2700K 3000K 3500K 4000K

HIGH CRI Ra90  
Vivid Colours Ra95  
Lichthoeken Angles de faisceau  
15° 24° 38° 60°  
Driver PHILIPS & CE  
TLE

**CANTO PRO 140mm**



○ ● Dimmable  
40W 45W  
3800/4200 Lm  
Ø95 x 140mm  
2700K 3000K 3500K 4000K

HIGH CRI Ra90  
Vivid Colours Ra95  
Lichthoeken Angles de faisceau  
15° 24° 38° 60°  
Driver PHILIPS & CE  
TLE

**SUPPORT GU10**



○ ●  
1 x GU10  
Ø54 x 95mm

1-Fase/Phase TGU102T  
3-Fase/Phase TGU104T  
GU10T Series  
BL / WH

**GU10 BASE**



○ ●  
1 x GU10  
Ø54 x 95mm  
Base Ø75x25mm

GU10M Series  
BL / WH

**GU10 RECESSED**



○ ●  
1 x GU10  
Ø54 x 95mm  
Cutout Ø65-70mm

GU10R Series  
BL / WH



# THE RIGHT LIGHT FOR EACH PROJECT


## WINNER-1 90mm



○ ● **NO-Dim**  
30W Reflector  
2900 Lm  
Ø95 x 90mm

3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver LIFUD & PHILIPS  
W1


## WINNER-2 183mm



○ ● **NO-Dim**  
25W & 30W Reflector  
2400/2900 Lm  
Ø77 x 183mm

3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver LIFUD & PHILIPS  
W2 25W/30W


## WINNER-3 105mm



○ ● **NO-Dim**  
32W Reflector  
3100 Lm  
Ø95 x 105mm

3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver CE, PHILIPS LED  
W3 25W

## WINNER-12 90mm



○ ● **NO-Dim**  
36W Reflector  
3500 Lm  
Ø100 x 96mm

3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver CE, PHILIPS LED  
W12 36W


## STAR 12



○ ● **Dimmable**  
30W  
3000 Lm  
L233 x W81 x H66mm

3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver LIFUD & CE TRIAC  
TLO

## TALO PRO 80mm



○ ● **Dimmable Food**  
15W 20W 30W  
1500/2000/3000 Lm  
Ø95 x 80mm

2700K 3000K 3500K 4000K

HIGH CRI Ra90, Tunable White  
Vivid Colours Ra95  
Lichthoeken Angles de faisceau



Driver PHILIPS & CE TRIAC  
TLO


## TALO PRO 120mm



○ ● **Dimmable Food**  
45W  
4200 Lm  
Ø95 x 120mm

2700K 3000K 3500K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver PHILIPS & CE TRIAC  
TLO


## COMPACT 80mm



○ ● **Dimmable**  
8W 12W 10W DTW  
650/980/810 Lm  
Ø62 x 80mm

2700K 3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver PHILIPS & CE TRIAC  
TLS TRACK

## LARGO COB Ø62mm



○ ● **Dimmable**  
8W 12W 10W DTW  
650/980/810 Lm  
Ø62 x 80mm Max.120cm

2700K 3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver CE TRIAC  
TLS PENDANT

## FINO COB Ø50mm



○ ● **Dimmable**  
6W 10W  
600/900 Lm  
Ø50 x 300mm Max.100cm

2700K 3000K 4000K **TW TUNABLE WHITE 3000-5700K**

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver CE TRIAC  
TLQ PENDANT

## LINEAR-60 60mm



○ ● **DALI**  
20W & 25W  
1800/2000 Lm  
600 x W50 x H70mm

3000K 4000K 5000K

HIGH CRI Ra90  
Lichthoek Angle de faisceau



Driver PHILIPS  
LL20 LL25

## LINEAR-120 100mm



○ ● **DALI**  
40W & 50W  
3600/4000 Lm  
1200 x W50 x H70mm

3000K 4000K 5000K **TW TUNABLE WHITE 3000-5700K**

HIGH CRI Ra90  
Lichthoek Angle de faisceau



Driver PHILIPS  
LL30 LL40

## STAR 5



○ ● **Dimmable**  
10W  
1000 Lm  
L195 x W43 x H66mm

3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver LIFUD & CE TRIAC  
TLO

## STAR 4



○ ● **Dimmable**  
12W  
1200 Lm  
L81 x W81 x H66mm

3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver LIFUD & CE TRIAC  
TLO

## STAR 8



○ ● **Dimmable**  
20W  
2000 Lm  
L156 x W81 x H66mm

3000K 4000K

HIGH CRI Ra90  
Lichthoeken Angles de faisceau



Driver LIFUD & CE TRIAC  
TLO